

## ABWINKELUNG

### KUPPLUNGSKÖRPER

DN	D innen	D außen	Wanddicke	Kupplung	LK	L	Steg
mm	d1 +/- 2mm	d3 +/- 1mm	d2 +/- 2mm	Art	+/- 2mm	mm	mm
150	150	186	18	PP	103	62	3
200	200	250	25	V4A	144	62	10
250	250	320	35	V4A	144	62	10
300	300	374	37	V4A	144	62	10
400	400	490	45	V4A	144	62	10


### MUFFENSPALT

EDELSTAHL WERKSTOFF-NR. 1.4571

DN	Muffenspalt (gesamt)	
	mm	mm
150	Mind. *	Max.
150	3 mm	25 mm
200	10 mm	25 mm
250	10 mm	25 mm
300	10 mm	25 mm
400	10 mm	25 mm

Kritischer Muffenspalt auf Anfrage.

\* Muffenspalt > Breite Steg Kupplung

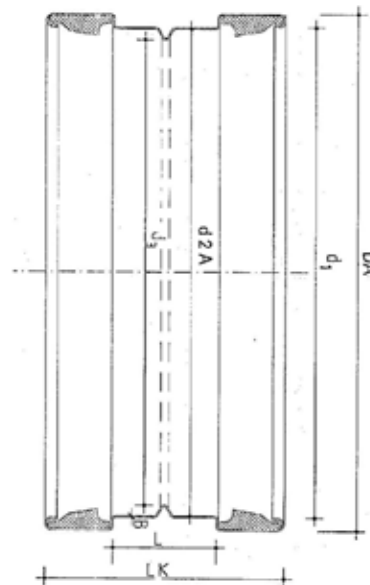

### ZULÄSSIGE ABWINKELUNG

DN	zul. Abw. *	Spalt Muffe	Abwinkelung	Abwinkelung/Kuppl.
mm	Grad	mm/DN	mm/m	mm/Kupplung
150	3,0°	10	54	108
200	3,0°	13	52	104
250	2,5°	14	44	88
300	2,5°	16	43	86
400	2,0°	17	35	70

\* zulässige Abwinkelung pro Spitzende